

268

Filter Regulator Combination

FRC

Compact combination unit for removing contaminants & moisture from compressed air in addition to regulating air pressure

Supplied complete with pressure gauge & wall mounting bracket

Regulator has a non raising "Press to Lock" adjusting knob for locking at any set pressure

MAX.
PRESSURE

145 PSI
(10 BAR)

Filter is designed with a separator & shield for efficient moisture separation



SPECIFICATIONS

Pressure Adjustment Range	7 - 145 PSI (0.5 to 10 BAR)
Filtering Element	Sintered Bronze (40 micron)
Drain Type	Semi Automatic

ORDERING INFORMATION

CAT NR.	DESCRIPTION	INLET/ OUTLET PORT SIZE	PRESSURE GAUGE PORT SIZE	MAX. FLOW RATE	BOX QTY.
FRC136134-S/GB	Miniature	1/4" BSP	1/8" BSP	550 LPM (20 CFM)	1
FRC156334-S/GB	Standard	1/2" BSP	1/8" BSP	3,000 LPM (106 CFM)	1

269

Filter Regulator & Lubricator - 2 Pc

FRCLM

Space saving 2 pc modular filter-regulator combination & lubricator

Lubricator feeds lubricants to air operated equipment maintaining a constant oil-to-air density over a wide range of flow


Filter removes contaminants & moisture from compressed air

Supplied complete with pressure gauge & wall mounting bracket

Regulator has a non raising "Press to Lock" adjusting knob for locking at any set pressure

MAX.
PRESSURE

145 PSI
(10 BAR)

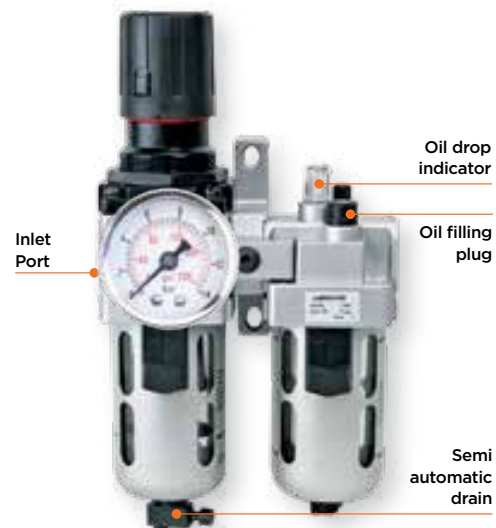

SPECIFICATIONS

Pressure Adjustment Range	7 to 145 PSI (0.5 to 10 BAR)
Filtering Element	Sintered Bronze (40 micron)
Drain Type	Semi Automatic

ORDERING INFORMATION

CAT NR.	DESCRIPTION	INLET/ OUTLET PORT SIZE	PRESSURE GAUGE PORT SIZE	MAX. FLOW RATE	BOX QTY.
FRCLM136134-S/WG	Miniature	1/4" BSP	1/8" BSP	500 LPM (18 CFM)	1
FRCLM156334-S/WG	Standard	1/2" BSP	1/8" BSP	2,800 LPM (99 CFM)	1