



The endless work lights...

GL-06



# LED WORK LIGHTS

Last Forever!



# INSIDE

## I

### FLOODLIGHTS



12W LED Floodlight	4
15W LED Floodlight	5
15W LED 'Super Cool' Floodlight	6
18W LED 'Super Cool' Floodlight	7
27W LED Floodlight	8
30W LED Floodlight	9
45W LED Floodlight	10
48W LED Floodlight	11

## II

### LIGHT BARS



36W LED Light Bar	13
72W LED Light Bar	14
120W LED Light Bar	15

## III

### WORKLIGHTS



30W SMD Site Lamp	17
60W SMD Site Lamp	18
9W LED Rechargeable Worklight	19
15W LED Worklight	20
18W LED Rechargeable Worklight	21
30W COB Rechargeable Worklight	22
Heavy Duty Rechargeable COB Worklight	24
15W COB Under-hood Light	26

36W 72 SMD Rechargeable Site Lamp	28
360° Swivel Rechargeable Worklight	29
360° Swivel Rechargeable Slim Worklight	30
12+1 SMD Slim Folding Inspection Light	32
2W COB Retractable Worklight	34
3W LED Inspection Lamp	35
3W COB Rechargeable Pen Light	36
3W COB Rechargeable Worklight	37
5W COB Rechargeable Worklight	38
5W COB Heavy Duty Rechargeable Worklight	40
7W COB Rechargeable Worklight	41

## IV

### FLASHLIGHTS



2W COB Rechargeable Pocket Flashlight	43
3W COB Pocket Flashlight	44
3W LED Slim Pen Light	45
5W LED Flashlight With UV & Laser	46
5W SMD Rechargeable Pocket Flashlight	47
Telescopic Magnetic Pick-Up Light	48
7W LED Rechargeable Spotlight	49

## V

### HEAD LAMPS



1W LED Rechargeable Head Lamp	51
3W COB Rechargeable Head Lamp with Sensor	52
3W LED Headlamp With Sensor	53
3W COB Head Lamp	54

## TERMS & CONDITIONS

**Intellectual Property:** The intellectual property of this catalogue is assigned to all countries of the world. Reproduction, full and/or partial adaptation of its content (content, images, diagrams, icons, specifications, tables etc.) by any means without prior written permission from GROZ entails a violation of GROZ ENGINEERING TOOLS's copyrights and constitutes an act of unfair competition

**Technical Data:** All drawings, weights, dimensions, the descriptions & illustrations contained in the company's catalogues are only approximate and intended merely to give a general description of the goods described therein.

**Specifications:** The information contained in this catalogue is as accurate as possible and complies, as far as possible with existing regulations at the time of its publication - January 2019. We therefore reserve the right to make modifications in line with modifications to regulations and/ or product specifications, drawings, illustrations for continual improvement. Buyers must ensure that goods are suitable for the purpose intended. Imperial dimensions shown as equivalents to metric and vice-versa are approximate.

**Delay in Delivery:** Delay in completion of work, delivery or in case of a contract for delivery by installments, delay in delivery of an installment shall not give rise to any liability upon the company whether or not any time of date is given in this respect and shall not entitle the customer to terminate the contract.

**Liability:** All goods are guaranteed to do the work for which they are designed. If the goods or any part thereof are defective solely as a result of faulty materials or workmanship of the company, the company's liability shall be limited, at its discretion either to replacing such goods or the defective parts. But no such liability shall arise unless notification of any defect is received by the company in writing within 90 days from the receipt of goods by the buyer and the allegedly defective goods are thereafter returned to the company carriage paid with appropriate pre-notification.

**Indemnity:** The customer shall indemnify the company against all claims in respect of any loss, injury or damage sustained by a third party arising from the sales of the goods to the buyer how so ever caused and also against all actions, proceedings, costs, claims, demands and expenses made, brought or claimed against the company in respect of the infringement of any patent, trademark or registered design.



[www.groz-tools.com](http://www.groz-tools.com)



**FLOODLIGHTS**



01

# 12W LED Floodlight

LED-505

**NEW!**

**12W LED Floodlight**  
4 Powerful LED's of 3W each

**Light Output**


High quality output of 840 lumen with a spread of 60° over a distance up to 60 meter

CE RoHS CREE

**Weather Proof Construction**

- a. **IP67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium die cast construction in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Corrosion resistant stainless steel bracket

**Power Source**



DC POWERED  
10V DC - 30V DC







Complete with 8" (200 mm) DC power cord

**Ideal for Outdoor Use**

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.


**FEATURES**

LUMEN	BEAM ANGLE	BEAM DISTANCE
 840	 60°	 60 M
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
 IP67	-20°C TO 45°C (-4°F TO 113°F)	



**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/505	55064	3-5/32 × 3 × 3-7/32	80 × 75 × 82	20



### 15W LED Floodlight

5 powerful LED's of 3W each



#### Light Output

High quality output of 900 lumen with a powerful flood spread of 60° over a distance up to 10 meter

#### Weather Proof Construction

##### a. IP 67 Rated


Protected against dust and effects of water immersion up to 1 meter

b. Corrosion resistant aluminium die-cast construction in premium powder coated finish

c. Sturdy polycarbonate lens to withstand the toughest of job site conditions

d. Corrosion resistant stainless steel bracket

#### Power Source



DC POWERED  
12V DC - 36V DC



Complete with 20" (500mm) DC power cord

Available as a single piece or set of two

#### Ideal for Outdoor Use

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

### FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
900	60°	10 M
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	



LED-501



### ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	SIZE (L×H×D)		BOX QTY.
			(INCH)	(MM)	
LED/501	55016	Single Piece	3-11/32 × 3-11/32 × 1-3/8	85 × 85 × 35	27
LED/502	55026	Set of Two	3-11/32 × 3-11/32 × 1-3/8	85 × 85 × 35	13





**15W LED Floodlight**  
5 powerful LED's of 3W each


**Light Output**

Super cool light offers high quality output of 1050 lumen with a powerful flood spread of 60° over a distance up to 10 meter


**Weather Proof Construction**

- a. **IP 67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium die-cast construction in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Tight rubber sealing prevents ingress of dust and moisture
- e. Corrosion resistant stainless steel bracket

**Power Source**



DC POWERED  
12V DC - 60V DC

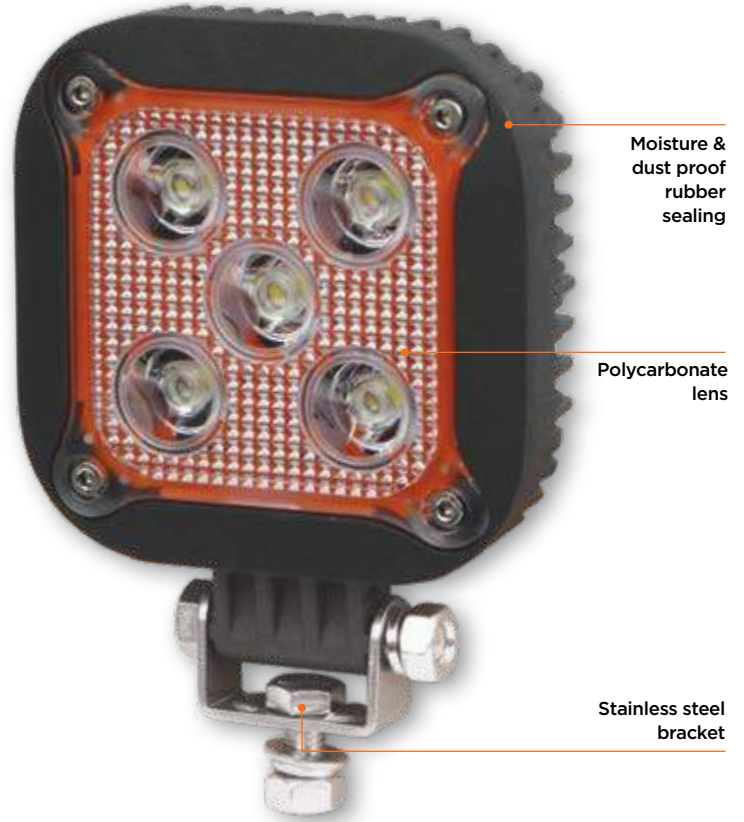






Complete with 20" (500mm) DC power cord

**Ideal for Outdoor Use**

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

**FEATURES**

LUMEN	BEAM ANGLE	BEAM DISTANCE
 1050	 60°	 10 M
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
 IP67	-20°C TO 45°C (-4°F TO 113°F)	



**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/520	55027	4 × 4-13/16 × 1-7/8	101 × 122 × 48	12

The most versatile floodlight for any application



### 18W LED Floodlight

6 powerful LED's of 3W each

### Light Output


Super cool light offers high quality output of 1200 lumen with a powerful flood spread of 60° over a distance up to 10 meter

### Weather Proof Construction

#### a. IP67 Rated

- Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium die-cast construction in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Tight rubber sealing prevents ingress of dust and moisture
- e. Corrosion resistant stainless steel bracket

### Power Source



DC POWERED  
12V DC - 60V DC



Complete with 20" (500mm) DC power cord

### Ideal for Outdoor Use


Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

### FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
1200	60°	10 M
WATER & DUST PROOF RATING		OPERATING TEMPERATURE
IP67		-20°C TO 45°C (-4°F TO 113°F)



Directs light beam to required direction

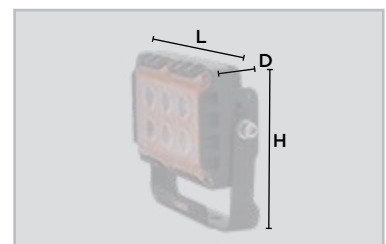

### ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/530	55028	4-9/32 × 5 × 1-21/32	109 × 127 × 42	12



**High output, super bright illumination over long distances**


**27W LED Floodlight**  
9 powerful LED's of 3W each

**Light Output**  
High quality output of 1890 lumen with a powerful flood spread of 60° over a distance up to 80 meter

**Weather Proof Construction**

- a. **IP 67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium die- cast construction in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Corrosion resistant stainless steel bracket

**Power Source**



**DC POWERED**  
9V DC - 32V DC

Complete with 18" (450mm) DC power cord

**Ideal for Outdoor Use**

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

**FEATURES**


LUMEN	BEAM ANGLE	BEAM DISTANCE
1890	60°	80 M
WATER & DUST PROOF RATING		OPERATING TEMPERATURE
IP67		-20°C TO 45°C (-4°F TO 113°F)

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/512	55061	4-1/4 × 4-1/4 × 2-27/32	108 × 108 × 72	20

**NEW!**

**CE RoHS CREE**





High output super bright floodlight for 'On-the-Go' use


**30W LED Floodlight**  
6 powerful LED's of 5W each

**Light Output**  
High quality output of 2250 lumen with a powerful flood spread of 60° over a distance up to 60 meter

**Weather Proof Construction**

- a. **IP 67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium die-cast construction in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Corrosion resistant stainless steel bracket

**Power Source**



DC POWERED  
9V DC - 32V DC

Complete with 8" (200mm) DC power cord

**Ideal for Outdoor Use**

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

**NEW!**

CE RoHS CREE



**FEATURES**

LUMEN	BEAM ANGLE	BEAM DISTANCE
2250	60°	60 m
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/545	55065	6 × 2-1/16 × 2-9/32	150 × 52.5 × 56	20



**07**

**45W LED Floodlight**

**LED-541**

**High output super bright floodlight for long distance visibility**


**45W LED Floodlight**  
15 powerful LED's of 3W each

**Light Output**  
High quality output of 3150 lumen with a powerful flood spread of 60° over a distance up to 80 meter

**Weather Proof Construction**

- a. **IP 67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium die-cast construction in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Corrosion resistant stainless steel bracket

**Power Source**







**DC POWERED**  
9V DC - 32V DC

Complete with 18" (450mm) DC power cord

**Ideal for Outdoor Use**

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

**FEATURES**


LUMEN	BEAM ANGLE	BEAM DISTANCE
 3150	 60°	 80 m
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
 IP67	-20°C TO 45°C (-4°F TO 113°F)	

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/541	55063	6-7/32 × 3-23/32 × 3	158 × 95 × 75	12

**NEW!**

**CE RoHS**




**Brightest floodlight on site**

**48W LED Floodlight**  
16 powerful LED's of 3 W each

**Light Output**  
High quality output of 3360 lumen with a powerful flood spread up to 60° wide and over a distance up to 80 meter

- Weather Proof Construction**
- a. **IP 67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
  - b. Corrosion resistant aluminium die-cast construction in premium powder coated finish
  - c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
  - d. Corrosion resistant stainless steel bracket

**Power Source**



DC POWERED  
9V DC - 32V DC

Complete with 18" (450mm) DC power cord

**Ideal for Outdoor Use**  
Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

**NEW!**

**CE RoHs**



**FEATURES**

LUMEN	BEAM ANGLE	BEAM DISTANCE
3360	60°	80 m
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	



**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/515	55062	4-1/4 × 5-13/32 × 2-27/32	108 × 138 × 72	20







[www.groz-tools.com](http://www.groz-tools.com)



**LIGHT  
BARS**

09

## 36W LED Light Bar

LED-701


**36W LED Light Bar**  
12 powerful LED's of 3W each

**Light Output**  
High quality output of 2520 lumen

**Combination Beam**  
Floodlight & spotlight in one; powerful flood spread & concentrated bright spot illumination are ideal for projecting light to long distances & keeping surrounding areas bright

- Weather Proof Construction**
- IP 67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
  - Corrosion resistant aluminium extruded housing in premium powder coated finish
  - Sturdy polycarbonate lens to withstand the toughest of job site conditions

**Power Source**



DC POWERED  
10V DC - 30V DC

Complete with 20" (500mm) DC power cord

**Ideal for Outdoor Use**  
Use on off-road vehicles, roof top of ATV's, UTV's, construction equipment, tractors, farm machinery, SUV's etc

**FEATURES**

LUMEN	WATER & DUST PROOF RATING
2520	IP67
OPERATING TEMPERATURE	
-20°C TO 45°C (-4°F TO 113°F)	


**NEW!**

CE RoHS CREE



270°  
Rotation

**COMBINATION BEAM**




- FLOODLIGHT
- SPOTLIGHT

	FLOODLIGHT	SPOTLIGHT	FLOODLIGHT
<b>BEAM ANGLE</b> 	60°	30°	60°
<b>BEAM DISTANCE</b> 	100	200	100

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/701	55066	8 × 4-17/32 × 3-11/32	204 × 115 × 85	12





**10**

**72W LED Light Bar**

**LED-711**


**72W LED Light Bar**  
24 powerful LED's of 3W each

**Light Output**  
High quality output of 5040 lumen

**Combination Beam**  
Floodlight & spotlight in one; powerful flood spread & concentrated bright spot illumination are ideal for projecting light to long distances & keeping surrounding areas bright

- Weather Proof Construction**
- a. **IP 67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
  - b. Corrosion resistant aluminium extruded housing in premium powder coated finish
  - c. Sturdy polycarbonate lens to withstand the toughest of job site conditions

**Power Source**



DC POWERED  
10V DC - 30V DC

Complete with 20" (500mm) DC power cord

**Ideal for Outdoor Use**  
Use in mining applications, on off-road vehicles, roof top of ATV's, UTV's, construction equipment, tractors, farm machinery, SUV's etc.


**FEATURES**

LUMEN	WATER & DUST PROOF RATING
5040	IP67
OPERATING TEMPERATURE	
-20°C TO 45°C (-4°F TO 113°F)	

**NEW!**  
CE RoHS CREE



**COMBINATION BEAM**




FLOODLIGHT  
 SPOTLIGHT

	FLOODLIGHT	SPOTLIGHT	FLOODLIGHT
<b>BEAM ANGLE</b> 	60°	30°	60°
<b>BEAM DISTANCE</b> METRES	100	200	100

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/711	55067	14 × 4-17/32 × 3-11/32	357 × 115 × 85	12





**120W LED Floodlight**  
40 powerful LED's of 3W each


**Light Output**  
High quality output of 8400 lumen

**Combination Beam**  
Floodlight & spotlight in one; powerful flood spread & concentrated bright spot illumination are ideal for projecting light to long distances & keeping surrounding areas bright

**Weather Proof Construction**

- a. **IP 67 Rated**  
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium extruded housing in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions

**Power Source**



DC POWERED  
10V DC - 30V DC

Complete with 20" (500mm) DC power cord

**Ideal for Outdoor Use**

Use in mining applications, on off-road vehicles, roof top of ATV's, UTV's, construction equipment, tractors, farm machinery, SUV's etc

**FEATURES**

<b>LUMEN</b>	<b>WATER &amp; DUST PROOF RATING</b>
8400	IP67
<b>OPERATING TEMPERATURE</b>	
-20°C TO 45°C (-4°F TO 113°F)	


**NEW!**

CE RoHS CREE



270°  
Rotation

**COMBINATION BEAM**




FLOODLIGHT  
 SPOTLIGHT

	FLOODLIGHT	SPOTLIGHT	FLOODLIGHT
<b>BEAM ANGLE</b> 	60°	30°	60°
<b>BEAM DISTANCE</b>  METRES	100	200	100


**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY
		(INCH)	(MM)	
LED/721	55068	22-1/8 × 4-17/32 × 3-11/32	562 × 115 × 85	6





[www.groz-tools.com](http://www.groz-tools.com)

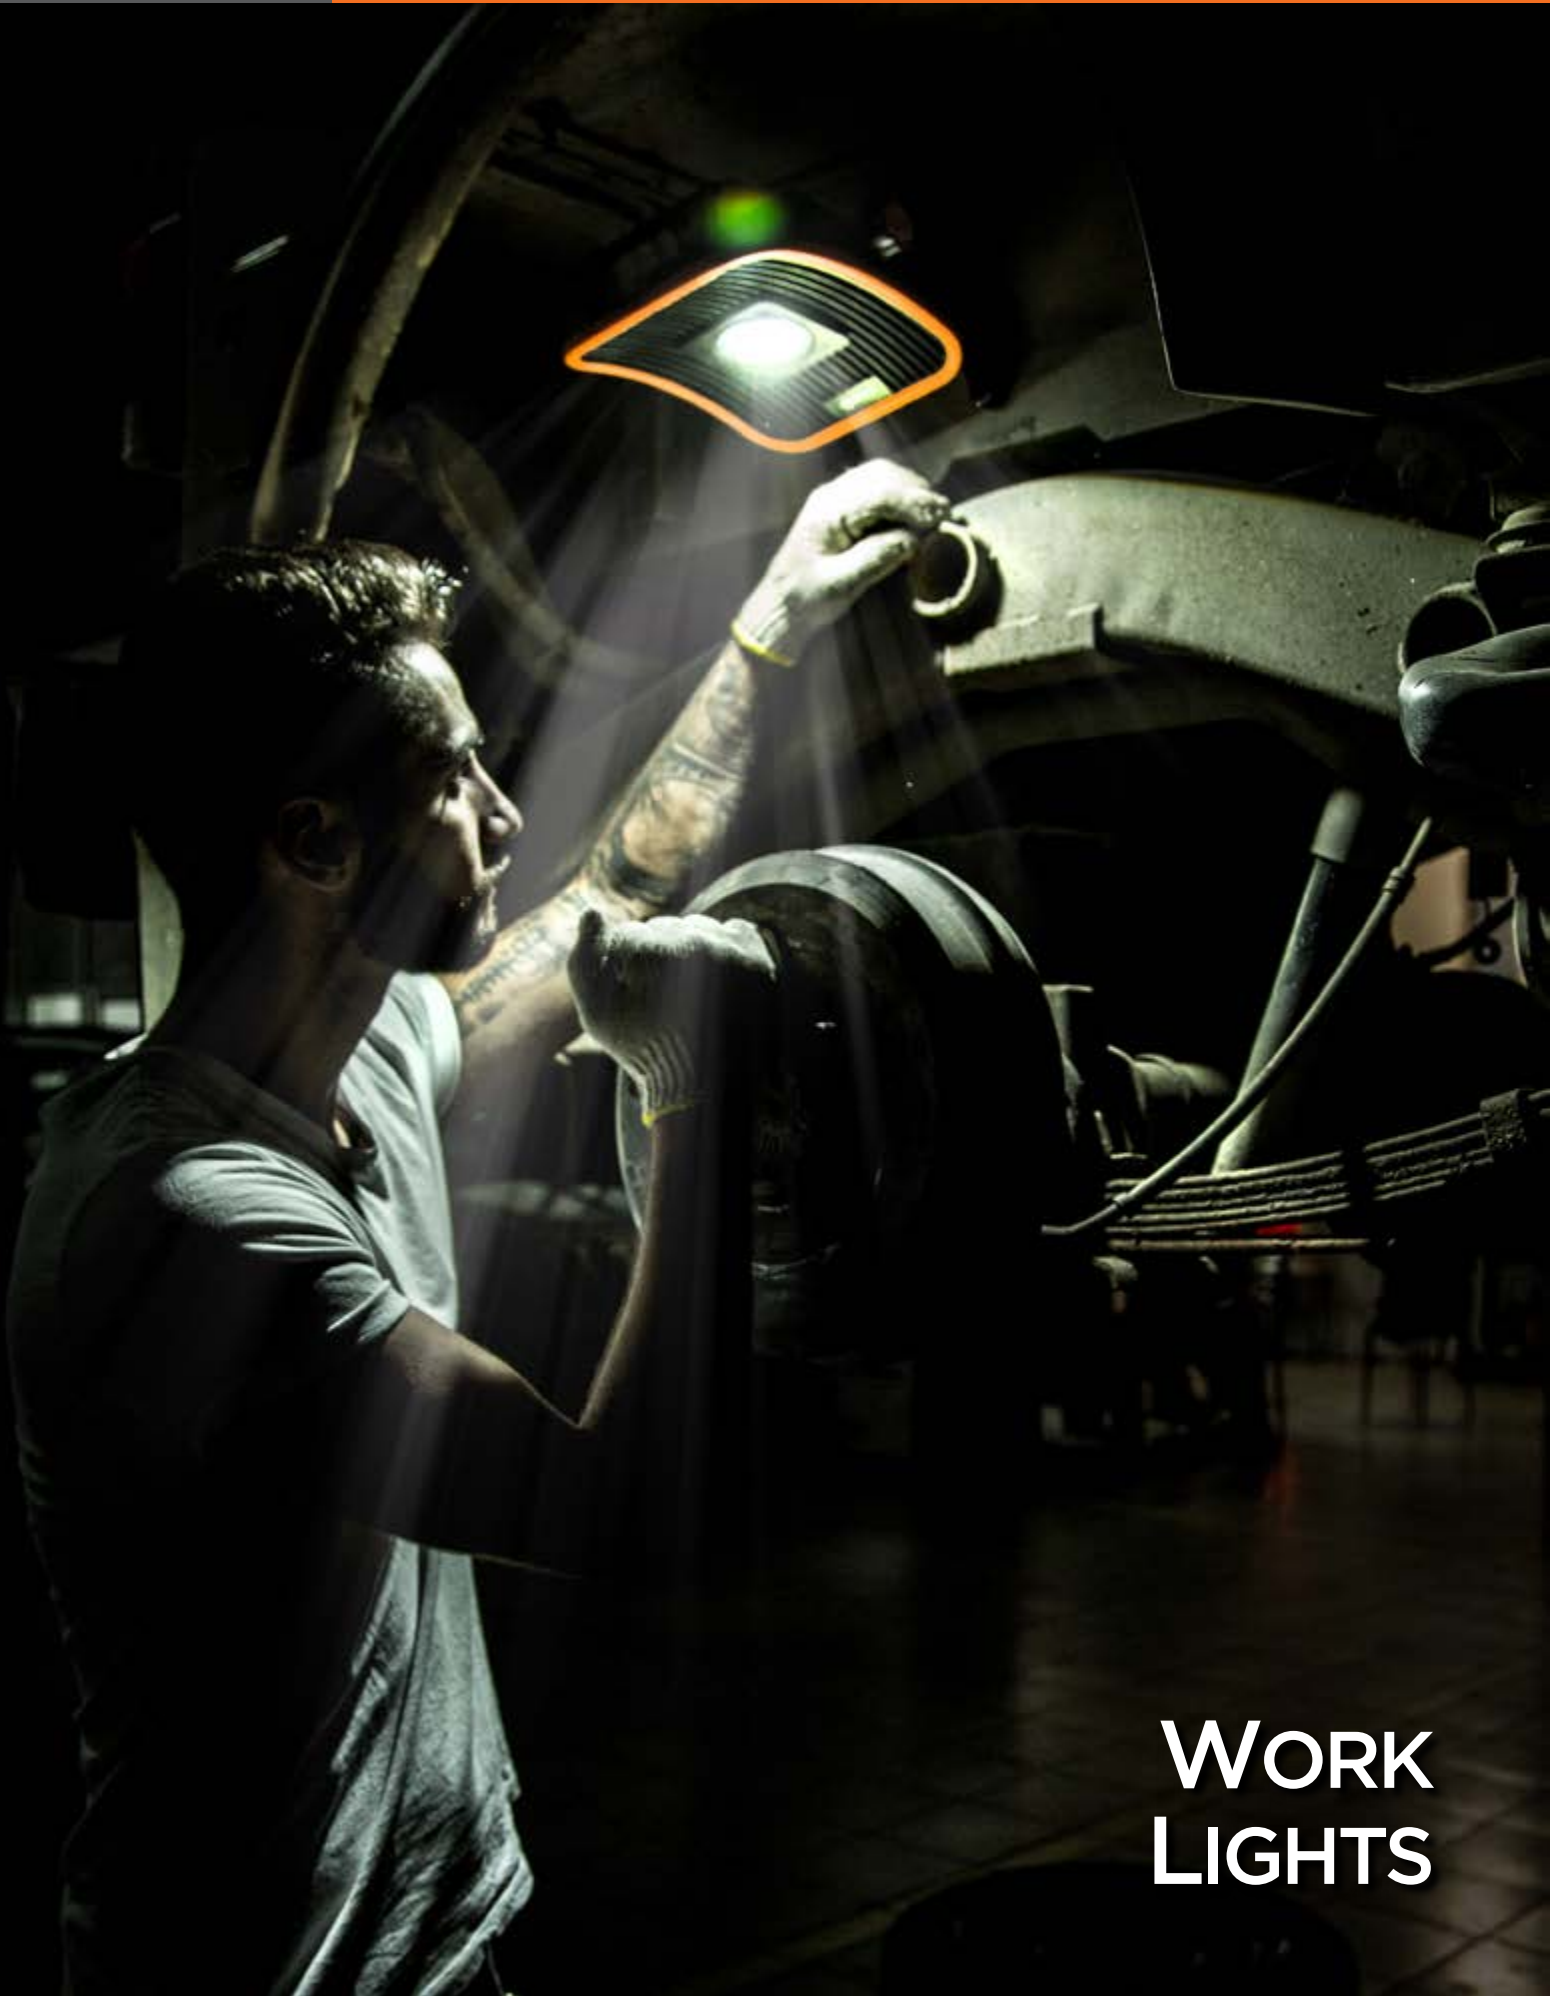

**WORK  
LIGHTS**

**30W SMD Site Lamp**  
Powerful 28 SMD's

**Light Output**

High quality output of 2100 lumen for maximum coverage of workspace

**Cool Light**

Finned design reduces heating up of light

**Sturdy Construction**


- a. **IP 65 Rated**  
Protected against dust and effects of pressure jets from any direction
- b. Corrosion resistant aluminium die-cast housing in premium powder coated finish
- c. High impact polycarbonate lens to withstand harsh job site conditions
- d. Complete with 4m long power cord

**Easily Portable**

Free standing steel stand with cushion grip and adjustable bracket makes it convenient to move light as required in the workspace

Easy Set-up and instant illumination

**Power Source**





AC POWERED  
220V AC, 50Hz  
110V AC, 60Hz

**Ideal For**

Use as a temporary light on construction sites, in general maintenance workshops etc.

**FEATURES**

LUMEN	BEAM ANGLE	WATER & DUST PROOF RATING
2100	110°	IP65
OPERATING TEMPERATURE		
-20°C TO 45°C (-4°F TO 113°F)		

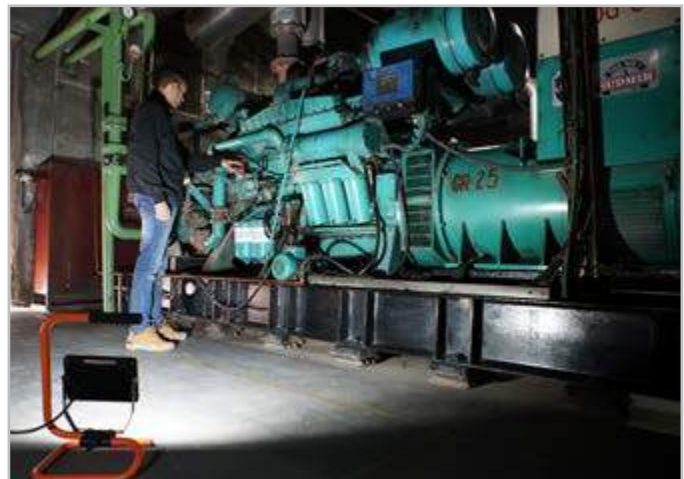

**ORDERING INFORMATION**

CAT NR.	ORD NR.	PLUG TYPE	SIZE (L×H×D)		BOX QTY.
			(INCH)	(MM)	
LED/602/US	55075	US Pin	9-1/16 × 14-3/16 × 8	230 × 360 × 205	8
LED/602/EU	55069	EU Pin	9-1/16 × 14-3/16 × 8	230 × 360 × 205	8

**NEW!**  
CE RoHs



**60W SMD Site Lamp**  
2 Powerful 28 SMD lights

**Light Output**

High quality output of 4200 lumen for maximum coverage of workspace


**Cool Light**

Finned design reduces heating up of light

**Sturdy Construction**

- a. **IP 65 Rated**  
Protected against dust and effects of pressure jets from any direction
- b. Corrosion resistant aluminium die cast housing in premium powder coated finish
- c. **Portable Tripod**  
Telescopic stand can be extended from 0.8m - 1.72m (31 - 67 inch) to light overhead work or minimise shadows when casting light downwards
- d. Complete with 4m long power cord


**Power Source**



AC POWERED  
220V AC, 50Hz  
110V AC, 60Hz

**Ideal For**

Easy Set-up and instant illumination makes it ideal for use as a temporary light on construction sites, in general maintenance workshops etc.

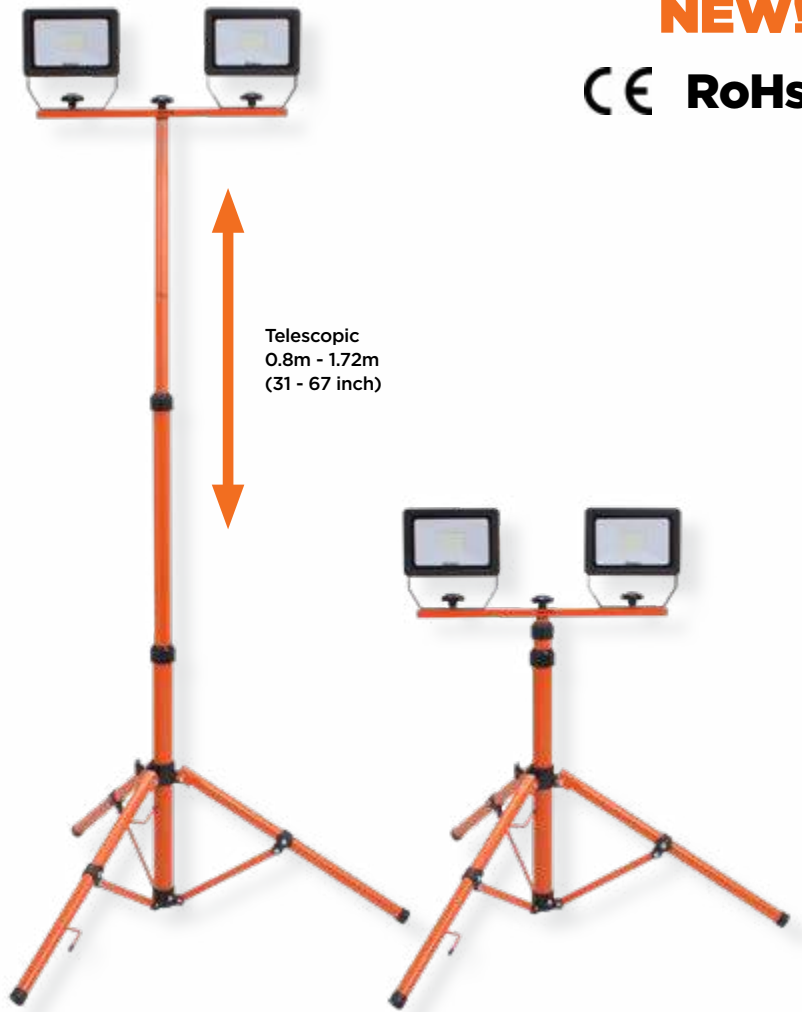


**NEW!**

**CE RoHS**

**FEATURES**

LUMEN	BEAM ANGLE	WATER & DUST PROOF RATING
4200	110°	IP65
<b>OPERATING TEMPERATURE</b>		
-20°C TO 45°C (-4°F TO 113°F)		



**ORDERING INFORMATION**

CAT NR.	ORD NR.	PLUG TYPE	SIZE (L×H×D)		BOX QTY.
			(INCH)	(MM)	
LED/612/US	55076	US Pin	37 × 68-3/32 × 37	940 × 1730 × 940	2
LED/612/EU	55070	EU Pin	37 × 68-3/32 × 37	940 × 1730 × 940	2

### 9W Rechargeable Worklight



#### Light Output

High quality & uniform output of 500 lumen

#### Dual Colour Output

- White
- Amber

#### Sturdy, Weather Proof Construction


- IP 65 Rated**  
Protected against dust and effects of low pressure water jet from any direction
- Corrosion resistant aluminium die cast housing in premium powder coated finish

#### Available in 2 versions

- LED-640:** with strong & sturdy steel base for balanced positioning in the toughest of environments
- LED-650:** with magnetic base; conveniently attaches to any metallic surface leaving both hands free

270° pivoting head directs the light beam to the required direction

#### Power Source



RECHARGEABLE BATTERY  
3.7V 6600 mA<sub>H</sub>

#### Charging of Battery

Battery can be recharged using USB cable provided with the light.

#### Charge Time

8-10 hours

#### Ideal For Portable Working

In maintenance, building construction, temporary lighting jobs etc.

LED-640



LED-650




### FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE	RUN TIME
500	60°	10 M	4 H
WATER & DUST PROOF RATING		OPERATING TEMPERATURE	
IP65		-10°C TO 45°C (14°F TO 113°F)	

### ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/640	55035	5-53/64 × 7-31/32 × 4-59/64	148 × 202 × 125	12
LED/650	55036	5-23/32 × 7-11/64 × 3-21/32	145 × 182 × 93	12



15

# 15W LED Worklight

LED-630

**15W LED Worklight**  
5 powerful LED's of 3W each

CE RoHS


**Light Output**

Portable worklight offers high quality output of 900 lumen with a spread 60° wide over a distance of 10 meter


**Weather Proof Construction**

- a. IP 67 Rated  
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium die cast housing in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Free standing base with magnet attaches conveniently to any metallic surface

**Power Source**



DC POWERED  
12V DC - 36V DC



CIGARETTE PLUG







Cigarette plug adaptor

**Ideal For Outdoor Use**

Use on off road vehicles, construction equipment, tractors, farm machinery etc.


**FEATURES**

LUMEN	BEAM ANGLE	BEAM DISTANCE
 900	 60°	 10 M
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
 IP67	-20°C TO 45°C (-4°F TO 113°F)	



**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/630	55034	3-17/32 × 12-3/8 × 3-27/64	90 × 314 × 87	12





16

## 18W LED Rechargeable Worklight

LED-621

**18W LED Worklight**  
6 powerful LED's of 3W each

**Light Output**  
High quality of 1,000 lumen


**Multiple Working Modes**  
High intensity, low intensity & SOS flashing

	MODE 1	MODE 2	MODE 3
TYPE	High Intensity	Low Intensity	SOS Flashing
RUN TIME	7 hours	11 hours	
LUMEN	1000	700	

**Weather Proof Construction**

- a. **IP65 Rated**  
Protected against dust and effects of low pressure water jets from any direction
- b. Corrosion resistant aluminium die cast construction in premium powder coated finish
- c. Free standing heavy duty magnetic base
- d. Sturdy polycarbonate lens to withstand the toughest of job site conditions

**Power Source**



**Charging of Battery**

Battery can be recharged using USB cable provided with the light.

**Charge Time**

8 hours

**Ideal For Portable Working**

In maintenance, building, construction, mining jobs etc.

**NEW!**



**FEATURES**

MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE	WATER & DUST PROOF RATING
1000	60°	10 M	IP65




Finned design offers excellent heat dissipation



**270°**  
Rotation

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/621	55044	5-1/16 × 9-19/32 × 4	129 × 244 × 100	12



## 30W COB Rechargeable Worklight

**Universal dual power worklight for endless applications both indoors & outdoors**

### 30W COB Worklight

Featuring COB technology the GROZ LED/670 delivers extremely high output with uniform and even illumination

### Light Output

Single button controlled variable output. Simply push button to change from 50% to full 100% intensity

POWER SOURCE	INTENSITY	LUMEN	RUN TIME
LI-ION BATTERY	100%	2800	2.5 Hrs
	50%	1400	5 hrs
AC SUPPLY	100%	2800	-

### Cool Light

Finned design reduces heating up of light

### Sturdy Construction

- IP 54 Rated**  
Protected against dust and effects of water spray from any direction
- IK 07 Rated**  
Impact-proof construction
- Corrosion resistant aluminium die cast housing in premium powder coated finish
- Rubberised edge guards make the light resistant to shocks and vibrations - common in any working environment

### Versatile Use

Can be used as:

- Free standing worklight with mounting bracket
- On magnetic base - removable magnetic base can be attached onto any metallic surface leaving both hands free
- On tripod stand - to light overhead work or minimise shadows when directing the light downwards.

### Charge Your Phone

Rechargeable and removable battery pack also doubles as a power bank

Easy Set-up and instant illumination makes it ideal for use as a temporary light on construction sites, in general maintenance workshops etc.

### Charge Time

3 hours



LED-670

LED-670T

CE RoHS IK07

NEW!



Easily Portable




Mounting bracket pivots full 180° to cast light as required

FEATURES

MAX. LUMEN	BEAM DISTANCE	BEAM ANGLE
2800	10 M	110°
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP54	-5°C TO 40°C (-23°F TO 104°F)	


DUAL POWER SOURCE




RECHARGEABLE BATTERY  
7.4V 4400 mAh



Powered with rechargeable Li-ion battery

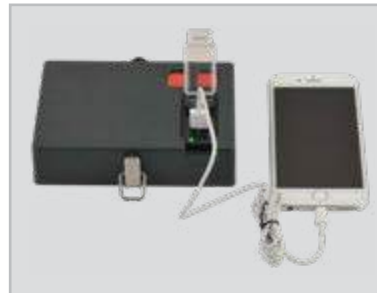

Rechargeable & removable battery pack can also be used as a power bank



AC POWERED  
220V AC, 50Hz  
115 V AC, 60Hz



Powered with AC Supply



ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	SIZE (L×H×D)		BOX QTY.
			(INCH)	(MM)	
LED/670	55050	Worklight	7-3/32 × 5-1/8 × 10	180 × 130 × 250	4
LED/670T	55077	Worklight mounted on tripod	7-3/32 × 39-3/8 × 10	180 × 1000 × 250	4





## Heavy Duty Rechargeable COB Worklight

Powerful rechargeable COB worklight designed for the professional user

Available in two versions

- a. **LED-550**  
10W COB
- b. **LED-560**  
20W COB

### COB Worklight

Featuring the COB technology these lights deliver extremely high output with uniform and even illumination

### Light Output

Single button controlled variable output. Simply push button to change from 50% intensity to full 100% power

	LED/550		LED/560	
WATTS	10W COB		20W COB	
BATTERY	3.7V, 4400mAh Li-ion		7.4V, 4400 mAh Li-ion	
INTENSITY	100%	50%	100%	50%
LUMEN	1000	500	2000	1000
RUN TIME	3 hours	6 hours	3 hours	6 hours
CHARGING TIME	5 hours	5 hours	5 hours	5 hours

### Cool Light

Finned design reduces heating up of light

### Sturdy Construction

- a. **IP 54 Rated**  
Protected against dust and effects of moisture from any direction
- b. **IK 07 Rated**  
Impact proof construction
- c. Corrosion resistant aluminium die cast housing in premium powder coated finish with rubberised edge guards make it resistant to shocks and vibration – common in any working environment

### Versatile Use

Can be used as:

- a. Free standing worklight with mounting bracket that can be rotated 180° to cast light in several directions as per need
- b. Directly attached to any metallic surface using the magnetic base plate. The magnetic base plate can be easily removed
- c. Hung from a scaffolding bracket  
Handle is designed for direct mounting on the scaffolding bracket leaving both hands free for any other job

Complete with USB cable & magnet holder

### Charging of Battery


Battery can be recharged using standard USB cable provided with the light

### Charge your Mobile Devices


USB output port for use as power bank



**LED-550**  
10W COB






RECHARGEABLE BATTERY  
3.7V 4400 mAh



ON/OFF Button

USB Output Port

### FEATURES

BEAM ANGLE  110°	BEAM DISTANCE  10 M
WATER & DUST PROOF RATING  IP54	OPERATING TEMPERATURE -5°C TO 40°C (23°F TO 104°F)

LED-550

LED-560

CE RoHS IK07

NEW!




Use magnetic base to attach to any metallic surface




Mounting bracket can be rotated 180°

LED-560  
20W COB



RECHARGEABLE BATTERY  
7.4V 4400 mAh



Impact Resistant Construction



Hands Free Working  
Light can be attached onto any metallic surface using removable magnetic base



Compact size making it easy to carry




Battery pack doubles up as a power bank  
- Charge your phone while you work!



ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	SIZE (L×H)		BOX QTY.
			(INCH)	(MM)	
LED/550	55046	10W COB	6-11/16 × 5	170 × 125	10
LED/560	55047	20W COB	7-9/32 × 5-1/2	185 × 140	8



19

## 15W COB Under-hood Light



**Expandable Length**  
1.2m - 1.76m (47 - 69 inch)

The new super bright under-hood light for powerful illumination of the entire engine bay. Shines brighter, grips stronger & outlasts most other lights!

### 15W COB Under-hood Light

3 powerful COB lamps of 5W each

#### Light Output

Single button, user controlled light output for maximized operating time. Choose between three light settings-high, medium & low

	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY
NR. OF LAMPS USED	3	2	1
LUMEN	1000	700	350
RUN TIME	3 hours	5 hours	7 hours

#### Sturdy Construction


- Aluminium extruded body with ABS coating. Built to withstand the toughest of job site conditions
- Soft padded aluminium hooks resist wear and provide scratch proof grip. Large gripping surface provides larger contact for better positioning when mounting the light under-hood, undercarriage or elsewhere
- 3 light bulbs with sturdy polycarbonate lens to withstand the toughest of job site conditions
- Fully adjustable light head: bulbs can be rotated 40° to provide the optimum light angle depending upon job need

#### Expandable Length

47 - 69 inch (1200 mm - 1750 mm)

This covers wide cars & trucks, making it a perfect choice for mechanics working in automotive shops or fleet maintenance

#### Power Source



RECHARGEABLE BATTERY  
3.7V 5200 mAh

#### Charging of Battery


Battery can be recharged using in-built USB charging port protected by rubber bezel

Complete with USB cable and AC Power Adaptor

#### Charging Time

4 hours

#### FEATURES

BEAM ANGLE	OPERATING TEMPERATURE
 60°	-5°C TO 40°C (-23°F TO 104°F)

#### ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/351	55084	47 × 3 × 2-3/8	1210 × 75 × 60	1



**NEW!**  
CE RoHs



Soft padded aluminium hooks for scratch proof grip



USB charging port with LED charge indicators



Light bulbs pivot independently to direct light as needed



**20**

# 36W 72 SMD Rechargeable Site Lamp

LED-660

**Multi-mode super bright  
36W 72 SMD site lamp**

**Light Output**

Single button controlled high quality output in multiple modes

	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY
LUMEN	3000	1500	750
RUN TIME	1.5 hours	2.5 hours	5 hours

**Sturdy Construction**


- a. **IP65 Rated**  
Protected against dust and effects of low pressure water jets from any direction
- b. Corrosion resistant aluminium die cast construction in premium powder coated finish
- c. Impact proof ABS frame
- d. Tempered glass lens
- e. Steel handle with foam grip for comfort in use
- f. Sturdy steel stand for balance positioning in the toughest of job site conditions

**Patented Design**

Unique & innovative 360° swivel & tilt mechanism. Stainless steel ball joint mechanism allows

- a. Swivelling of light full 360°
- b. Tilt

**Power Source**



RECHARGEABLE BATTERY  
7.4V 4400 mAh

**Charging of Battery**

Battery can be recharged using dual voltage 100V-240V AC charger, provided with the light

**Charge Time**

4.5 hours

**FEATURES**

WATER & DUST PROOF RATING	BEAM ANGLE	BEAM DISTANCE
IP65	120°	45 M
OPERATING TEMPERATURE		
-10°C TO 40°C (-14°F TO 104°F)		

Tilt & Swivel to 360°



3 LED battery level indicator  
5V 2.1 Amp USB output port for use as power bank



Power Button


USB Port



**360°**  
Rotation

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/660	55043	8.7 × 8.7 × 12.2	223 × 223 × 309	8



**Multi-function, powerful worklight & spotlight in one**

Featuring SMD technology, the GROZ LED/360 worklight is powered by 7 SMD. Top torch is powered by 3W LED

**NEW!**

**CE RoHS IK07**

**Light Output**

High quality output in multiple modes

	HIGH INTENSITY		LOW INTENSITY	
	LUMEN	RUN TIME	LUMEN	RUN TIME
WORKLIGHT	400	3 hours	200	7 hours
TOP TORCH	120 lumen with a run time of 8 hours			

**Sturdy Construction**

- a. **IP 54 Rated**  
Protected against dust and effects of water spray from any direction
- b. **IK07 Rated**  
Impact proof ABS body
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Nylon hooks with ratcheting mechanism can be rotated full 360° for convenient placement of light

**Patented Design**


Unique & innovative 360° swivel & tilt mechanism. Stainless steel ball joint mechanism allows

- a. Swivelling of light full 360°
- b. Tilt

**Hands Free Operation**

Three magnets; two on the rear of the light & one on the end, can be attached to any metallic surface leaving both hands free

**Power Source**



**RECHARGEABLE BATTERY**  
3.7V 2200 mAh



**Charging of Battery**

Battery can be recharged using 1m long 5V micro USB cable provided with the light

**Charge Time**

4 hours

**Ideal For**

Use in automotive repairs, machinery repairs etc.

**FEATURES**

MAX. LUMEN	BEAM ANGLE	WATER & DUST PROOF RATING	OPERATING TEMPERATURE
400	120°	IP54	-10°C TO +40°C (14°F TO 104°F)

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE		BOX QTY.
		(INCH)	(MM)	
LED/360	55037	10 × 2-9/32 × 1-57/64	254 × 58 × 48	12



Fully flexible 360° swivel & tilt design with unique ball joint

2 fold out 360° swivelling hooks for easy installation



## 360° Swivel Rechargeable Slim Worklight

Super slim worklight for all difficult to reach areas, tight and cluttered workspaces with utmost ease

### 6W COB Light

Featuring COB technology, the Groz LED/370 is an integrated  
 a. 6W Worklight  
 b. 1W Top Torch

### Light Output

Super slim light offers high quality output as both worklight and spotlight.

Smart design ensures user controlled output. Adjust light intensity from 0-600 lumen by simply rotating the knob as per need

### Sturdy Construction

- a. **IP 54 Rated**  
Protected against dust and effects of water spray from any direction
- b. **IK 07 Rated**  
Impact Proof Construction ABS body
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
- d. Nylon hook with ratcheting mechanism can be rotated full 360° for convenient placement of light as required

### Patented Design


Unique & innovative 360° swivel & tilt mechanism. Stainless steel ball joint mechanism allows

- a. Swivelling of light full 360°
- b. Tilt

### Hands Free Operation

Three rubber covered magnets at the rear end to affix light on any metallic surface leaving both hands free

### Power Source



**RECHARGEABLE BATTERY**  
3.7V 2600 mAH

### Charging of Battery

Battery can be recharged using in-built micro USB charging port protected by rubber bezel

Comes with 5V braided USB cable

### Charge Time

4 hours

### ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/370	55042	15-11/32 × 1-37/64 × 1-3/8	390 × 40 × 35	15

**NEW!**

**CE RoHS IK07**



LED-370

# BRING IN THE LIGHT!



Rotating the knob clockwise increases the intensity of the light

**RUN TIME**  
**1.5 hours**  
 (at full intensity)  
**16 hours**  
 (at lowest intensity)

Adjust the light intensity via simple to use rotating knob

	WORKLIGHT		TOP TORCH	
	LUMEN	RUN TIME	LUMEN	RUN TIME
FULL INTENSITY	600	1.5 hours	120	10 hours




360° Swivel & tilt design with unique ball joint



Rotating Hook with Ratcheting Mechanism

## FEATURES

WATER & DUST PROOF RATING	BEAM ANGLE	OPERATING TEMPERATURE
IP54	120°	-10°C TO +40°C (14°F TO 104°F)

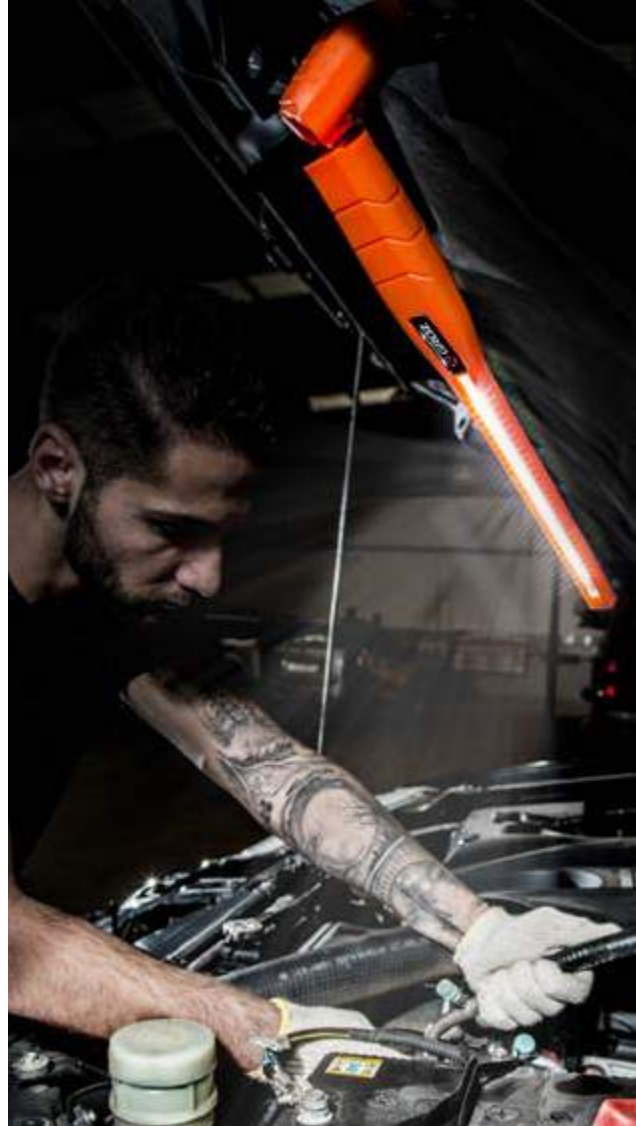

## 12+1 SMD Slim Folding Inspection Light

The new 3-in-1 ultra thin & compact inspection light for difficult to reach & narrow workspaces

Worklight, inspection light and spotlight all in one

### 12+ 1 SMD Light

- a. Powerful 12 SMD light bar with a spread of upto 120°
- b. 1W SMD Top torch for focused illumination

### Light Output

Super slim light offers high quality output as both worklight and spotlight

Smart design ensures user controlled output. Adjust light intensity from 0-400 lumen by simply rotating the knob as per need

### Sturdy Construction

- a. Impact proof ABS body
- b. Sturdy polycarbonate lens to withstand the toughest of job site conditions


### Compact Folding Design

Fully folded the lamp is reduced to a pocket sized worklight

### Hands Free Operation

Three super strong magnets on sides and rear end help affix the light on any metallic surface leaving both hands free

### Power Source



RECHARGEABLE BATTERY  
3.7V 2000 mAh

### Charging of Battery

In-built micro USB charging port protected by rubber bezel

Comes complete with 5V braided USB cable

**NEW!**

CE RoHS IK07



### ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/180	55045	11-51/64 × 1-49/64 × 1-21/64	300 × 45 × 34	50



LED-180

# BRING IN THE LIGHT!



Adjust light intensity via simple to use rotating knob

	INSPECTION LIGHT / WORKLIGHT		SPOTLIGHT		CHARGE TIME
	LUMEN	RUN TIME	LUMEN	RUN TIME	
FULL INTENSITY	400	3 hours	70	8 hours	4 hours




180° rotating light bar folds back to a compact pocket size worklight



Hanging Hook

## FEATURES

BEAM ANGLE	OPERATING TEMPERATURE
 120°	-10°C TO +40°C (14°F TO 104°F)



**24**

**2W COB  
Retractable Worklight**

**LED-305**

**Compact retractable flashlight and spotlight in one. Pull to switch On and push back to switch Off**

2W COB flashlight & 1W LED spotlight

**COB Worklight**

Featuring COB technology, the light delivers high output with uniform and even illumination

**1W LED Top Torch**

For focussed illumination over long distances

**Light Output**

High quality output with wide spread illumination

	FLASHLIGHT	SPOTLIGHT/ TOP TORCH
LUMEN	170	40
RUNTIME	7 hours	14 hours

**Sturdy Construction**

- a. Impact proof ABS body
- b. Rubberised coating on grip for comfort in use
- c. 90° Tilting Head: Head can be tilted 90° to focus in-built spotlight beam as required


**Hands Free Operation**

Magnet at rear end of light can be attached to any metallic surface leaving both hands free

**Expandable Length**

7-31/64 - 10-41/64 inch  
(190 mm - 270 mm)

**Power Source**



3 × AAA ALKALINE BATTERIES (provided with light)

**ORDERING INFORMATION**



CAT NR.	ORD NR.	BOX QTY
LED/305	55054	20

**NEW!**

**CE RoHS**



**FEATURES**

BEAM ANGLE	BEAM DISTANCE	OPERATING TEMPERATURE
 100°	 15m	-5°C TO 40°C (-23°F TO 104°F)

**25**

**3W LED  
Inspection Lamp**

**LED-321**

**24 LED inspection Lamp**

**Light Output**

Super bright output of 110 lumen


**Construction**

- a. Impact resistant ABS body
- b. Integrated hook that can be swivelled 360° to position light as required

**Hands Free Use**

Powerful magnet built into back of light can be affixed onto any metallic surface leaving both hands free

**Power Source**



3 × AA BATTERIES  
(provided with light)

**NEW!**





On/Off  
button



Magnets on the back help affix the light on any metallic surface leaving both hands free

**FEATURES**

LUMEN	RUN TIME	BATTERY INCLUDED
 110	 4 H	<b>3</b> AA
<b>OPERATING TEMPERATURE</b>		
-5°C TO 40°C (-23°F TO 104°F)		



Swivel hook adjusts to different angles



Strong magnet attaches to most metal surfaces

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/321	55078	8-17/64 × 2-23/64 × 1-11/64	210 × 60 × 30	50



**Super bright, dual function portable worklight & top torch**

**3W COB Light**

Featuring COB technology, the GROZ LED/335 is an integrated 3W COB worklight & 1W LED top torch

**Light Output**

High quality output in different modes

	MAIN LIGHT		TOP TORCH	
	LUMEN	RUN TIME	LUMEN	RUN TIME
FULL INTENSITY	180	2 hours	65	2 hours


**Light Weight & Durable Construction**

- a. Impact proof & water resistant ABS body with rubber coating
- b. Integrated Pocket Clip: Can be hooked onto a pocket /belt for easy mobility & hands free operation. Clip is adjustable up to 120° for directing light in desired direction

**Hands Free Use**

Magnet on clip can be used to affix light on any metal surface

**Power Source**



RECHARGEABLE BATTERY  
3.7V 800 mAh



**Charging of Battery**

Battery can be recharge using a micro USB cable provided with the light. Micro USB port is protected by plastic bezel

**Charge Time**

2 hours

**FEATURES**

BEAM ANGLE	BEAM DISTANCE	OPERATING TEMPERATURE
 120°	 20m	-10°C TO +50°C (14°F TO 122°F)

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/335	55057	7-9/32 × 1-25/64 × 13/16	185 × 35 × 20	50

**NEW!**

**CE RoHs**



120° Adjustable Pocket Clip with magnet to hook onto any magnetic surface

**Multi-function, powerful worklight & top torch**

**COB Worklight**

Featuring COB technology the worklight delivers extremely high output with uniform and even illumination

Top Torch is powered by 3W LED

**Light Output**

High quality output of 160 lumen by main light & focused illumination of 60 lumen by top torch


**Durable Construction**

- a. Impact proof & water resistant ABS body with rubber coating
- b. 360° rotating hook to suspend light leaving both hands free
- c. Integrated pocket/belt clip to conveniently store and carry light wherever you go
- d. Swivelling magnetic stand swivels up to 180° to adjust to required angle

**Hands Free Operation**

- a. Swivelling stand with super strong magnets to position light on any metallic surface
- b. Magnet on clip can also be used to affix light on any metal surface

**Power Source**



**RECHARGEABLE BATTERY**  
3.7V 1200 mAh

**Charging of Battery**


Battery can be recharged using a micro USB cable provided with the light. Micro USB port is protected by rubber bezel

**Charge Time**

2.5 hours; charge display via 5 green LED's, each showing 20% charge

**NEW!**

**CE RoHS**



Swivelling Magnetic Stand



Rotating Hook



Pocket / Belt Clip

**Multiple Mode Output**

	DESCRIPTION
1ST PRESS	Top torch switches On
2ND PRESS	Main worklight switches On
3RD PRESS	All lights switch Off

**FEATURES**

MAX. LUMEN	RUN TIME	BEAM ANGLE
160	3.5 H	120°
BEAM DISTANCE	OPERATING TEMPERATURE	
30m	-10°C TO +50°C (14°F TO 122°F)	

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/390	55059	6-7/64 × 1-37/64 × 1-11/64	155 × 40 × 30	50

## 5W COB Rechargeable Worklight

**Multi-function, powerful worklight & top torch**

**COB Worklight**

Featuring COB technology the worklight delivers extremely high output with uniform and even illumination

Top Torch is powered by 3W LED

**Light Output**

High quality output, both as a worklight & top torch

Smart design ensures user controlled output. Adjust light intensity of worklight and top torch by pressing on the increase (+) or decrease (-) buttons

Built-in memory function starts the light at the same intensity as when it was switched off


**Durable Construction**

- a. Impact proof & water resistant ABS body with rubber coating
- b. 360° rotating hook to suspend light leaving both hands free
- c. Integrated pocket/belt clip to conveniently store and carry light wherever you go. Clip also has a magnet to attach light to any metallic surface
- d. Swivelling Stand: Can be rotated full 180° to position light as needed

**Hands Free Operation**

- a. Swivelling stand with super strong magnets to position light on any metallic surface
- b. Magnet on clip can also be used to affix light on any metal surface

**Power Source**



**RECHARGEABLE BATTERY**  
3.7V 2000 mAh

**Charging of Battery**

Battery can be recharged using a micro USB cable provided with the light. Micro USB port is protected by rubber bezel

**Charge Time**

2.5 hours (indicated via LED display). Charge display via 5 LED's, each showing 20% charge

**Charge Your Mobile Device**

USB output port for use as power bank





**Multiple Mode Output**

	DESCRIPTION
1ST PRESS	Top torch switches On
2ND PRESS	Main Worklight switches On
3RD PRESS	All lights switch Off

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE		BOX QTY.
		(INCH)	(MM)	
LED/395	55060	7-9/32 x 2-3/8 x 1-17/64	185 x 60 x 32	50

**FEATURES**

BEAM ANGLE	BEAM DISTANCE	OPERATING TEMPERATURE
 120°	 30m	-10°C TO +50°C (14°F TO 122°F)

**NEW!**

**CE RoHS**



	WORKLIGHT		TOP TORCH	
	LUMEN	RUN TIME	LUMEN	RUN TIME
FULL INTENSITY	350	3.5 hours	180	6 hours



USB output port to charge mobile devices



Swivelling Magnetic Stand: The base can swivel upto 180° to adjust to the required angle. The magnetic end helps affix the light for hands free use



Rotating Hook



Pocket / Belt Clip



**NEW!**

Portable worklight and flashlight in one  
- ideal for outdoor applications

**5W COB LED Worklight**

Featuring COB LED technology the GROZ LED/380 delivers bright and high output per square inch with even illumination

**Light Output**


Single button controlled output

	TYPE	RUN TIME
1st Press	White floodlight	4 hours
2nd Press	Red floodlight	4 hours
3rd Press	Red Hazard flasher	10 hours

**Durable Construction**

Light weight yet sturdy aluminium tubing with TPR grip makes the light impact resistant

**Power Source**



RECHARGEABLE BATTERY  
3.7V 2200 mAh

**Unique Battery Charging Options**

- a. Magnetic docking station with USB cable
- b. USB cable with magnetic button charger


**Hands Free Usage**

Super strong magnet on light base makes it convenient to mount light on any metallic surface leaving both hands free

**Charge Time**

4.5 hours

**FEATURES**

LUMEN	OPERATING TEMPERATURE
 500	-10°C TO 40°C (-23°F TO 104°F)

**BATTERY CHARGING OPTIONS**



Magnetic docking station charger



Magnetic button USB cable



**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE		BOX QTY.
		(INCH)	(MM)	
LED/380	55058	7-51/64 × 1-1/16 × 1-3/16	198 × 27 × 30	36

**30**

**7W COB  
Rechargeable Worklight**

**LED-345**

**7W COB LED Worklight**

Featuring the COB LED technology the GROZ LED/345 delivers bright and high output per square inch with even illumination

**Battery Powered Input**

Light works on rechargeable 3.7V, 4400 mAh lithium ion battery

In-built overcharge/discharge control with automatic cut-off enhances battery life & performance

**Light Output**

Single button controlled variable output with a maximum output of 650 lumen flood beam

MODES	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY
LUMEN	650	400	200
RUN TIME	4 hours	6 hours	11 hours

**Construction**

Lightweight yet rugged aluminium tubing with TPR grip makes it impact resistant

**Hands free usage**

Attach light to any metallic surface leaving both hands free

2 ratcheting hooks with 360° swivel movement

**Recharging of Battery**

Battery can be recharged using standard 1m long USB cable


**Charge Time**

6 hours

Charging level indicators clearly marked

- a. **GREEN:** Full Charge
- b. **RED:** Charging in process

**Power Source**



**RECHARGEABLE BATTERY**  
3.7V 4400 mAh

**FEATURES**

OPERATING TEMPERATURE	BEAM ANGLE
-10°C TO 40°C (-23°F TO 104°F)	 120°

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/345	55040	18 × 3-3/16 × 2-49/64	458 × 81 × 70	10

**NEW!**



**IV**

[www.groz-tools.com](http://www.groz-tools.com)



**FLASHLIGHTS**

Super bright pocket flashlight

### 2W COB Flashlight

Featuring COB technology, flashlight delivers very high output with uniform and even illumination


### Light Output

200 Lumen of extremely bright light

### Durable Construction

- a. Impact proof and water resistant ABS body with rubber coating
- b. 360° rotating hook to position light in any direction
- c. Integrated pocket/belt clip to conveniently store and carry the light
- d. Swivelling magnetic stand with strong magnet to position at any angle on a metallic surface

### Power Source



RECHARGEABLE BATTERY  
3.7V 1800 MAH

### Charging of Battery

Battery can be recharged using a micro USB cable provided with the light.

Micro USB port is protected by rubber bezel

### Charge Time

3 hours

### Charge your Mobile Devices

Output port for use as power bank

**NEW!**

**CE RoHS**



### FEATURES

LUMEN	RUN TIME	BEAM ANGLE
200	3 H	90°
BEAM DISTANCE	OPERATING TEMPERATURE	
10 m	-5°C TO 40°C (23°F TO 104°F)	



**Power Bank**  
5V 1 Amp USB output port for use as power bank



Can be hooked onto a Belt / Pocket for easy mobility

### ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/150	55049	2-3/8 × 1-3/8 × 4-27/32	60 × 35 × 123	20



**32**

**3W COB  
Pocket Flashlight**

**LED-140**

**3W COB LED Light**

Featuring COB technology, the GROZ LED 140 is a handy pocket flashlight

**Light Output**

Super bright & uniform flooding illumination of 150 lumen


**Durable Construction**

- a. Impact proof & water resistant ABS body in matte black finish
- b. Integrated pocket clip to conveniently carry the light around

**Hands Free Operation**

- a. Magnet on clip can also be used to affix light on any metal surface

**Power Source**







3 × AAA ALKALINE BATTERIES (INCLUDED)

**NEW!**  
**CE RoHS**



**FEATURES**

LUMEN	RUN TIME
 150	 4 H
BEAM ANGLE	BEAM DISTANCE
 180°	 10 M

**HANDS FREE USE**



Can be hooked onto a pocket or belt for easy mobility & hands free use



Magnetic clip to attach light to any metallic surface for hands free usage

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/140	55039	4-11/32 × 1-3/16 × 23/32	110 × 55 × 21	24

**33**

## 3W LED Slim Pen Light

LED-160

Extra-ordinary, high quality slim pen light designed for the professional user

### Light Output

Multiple modes with just the press of a button

Light output reaches up to a distance of 50 metres

### Robust Construction

- IP 54 Rated**  
Protected against dust and effects of water spray from any direction
- Robust aluminium body makes the light usable even in rugged conditions
- Military grade anodised coating for enhanced durability
- Non-slip knurled grip
- Integrated pocket clip for easy and safe portability


### Unique L-Head Design

Head can be turned 90° giving the user freedom to direct light beam as required

### Hands Free Operation

Super strong magnet at the rear end can be affixed onto any metallic surface leaving both hands free

### Power Source



2 × AAA BATTERIES  
(not included)



**NEW!**

**CE RoHS**

### FEATURES

MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE
150	20°	50 M
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP54	-20°C TO +50°C (68°F TO 122°F)	

### Multiple Mode Output

	1ST PRESS	2ND PRESS	3RD PRESS & HOLD	4TH PRESS
	HIGH INTENSITY	LOW INTENSITY	QUICK FLASHING	SOS FLASHING
LUMEN	150	60		
RUN TIME	2.5 hrs	8 hrs		

### ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/160	55073	6 × 19/32 × 45/64	152 × 15 × 17.5	36

Heavy duty multi-mode flashlight, laser light & UV pointer all in one

**Light Output**

Multiple mode output with just the press of a button

**Robust Construction**

a. **IP 54 Rated**

- Protected against dust and effects of water spray from any direction
- b. Military grade anodised coating for enhanced durability
- c. Robust aluminium body makes the light usable even in rugged condition
- d. Non-slip knurled grip
- e. Integrated pocket clip for easy and safe portability


**Unique L-Head Design**

Head can be turned 90° giving the user freedom to direct light beam as required


**Hands Free Operation**

Super strong magnet at the rear end can be affixed onto any metallic surface leaving both hands free

**Power Source**



3 × AAA BATTERIES (not included)



**FEATURES**

MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE
300	20°	66 M
WATER & DUST PROOF RATING	UV BANDWIDTH	
IP54	395NM	
OPERATING TEMPERATURE		
-20°C TO +50°C (68°F TO 122°F)		

**Multiple Mode Output**

	1ST PRESS	2ND PRESS	3RD PRESS	4TH PRESS & HOLD	5TH PRESS	6TH PRESS
	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY	LASER LIGHT	LASER LIGHT & HIGH INTENSITY	UV LIGHT
LUMEN	300	100	30	-	300	-
RUN TIME	3 hrs	7 hrs	20 hrs	-	3 hrs	-

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY
		(INCH)	(MM)	
LED/170	55074	5-7/8 × 1-29/64 × 1-11/64	149 × 37 × 30	36

**Pocket sized, rechargeable high quality flashlight for the professional user**

5W SMD Flashlight

**Light Output**

High quality flooding beam adjustable to a maximum of 500 lumens

STEP 1	Press On/Off to switch on the light
STEP 2	Press On/Off again & hold to adjust light intensity between 50-500 lumens

**Unique 'Lock-Out' Transport Lock Feature**

No more accidental switching on, no more wastage of battery power

Light can be switched off and locked before keeping in the pocket. Press & hold light switch until the light blinks twice to activate 'Lock Out' mode. A very useful feature when carrying light in a pocket

**Built-in memory function:**

Starts light at the same intensity as when it was switched off


**Robust Construction**

- a. Corrosion resistant aluminium alloy construction
- b. Pocket clip for convenient and safe portability
- c. Integrated hook for hanging light

**Hands Free Use**

Magnetic base makes it easy to mount light on any metallic surface leaving both hands free

**Power Source**



**RECHARGEABLE BATTERY**  
3.7V 1800 mAh

**Charging of Battery**

Battery can be recharged using built-in micro USB charging port protected by a rubber bezel

Includes USB charging cable

**Charge Time**





3.5 hours

**NEW!**

**CE RoHS**



**FEATURES**

LUMEN	RUN TIME	BEAM DISTANCE	BEAM ANGLE
 500	 2.5 H	 28 m	 70°
OPERATING TEMPERATURE			
-20°C TO +40°C (68°F TO 104°F)			

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/190	55081	4-3/16 × 1-25/32 × 1-15/32	106 × 48 × 36.5	48



Pocket clip with integrated hook



USB charging port protected by rubber bezel



# 36

## Telescopic Magnetic Pick-Up Light

LED-131

**NEW!**

### Dual Purpose Light

High quality 0.5W flashlight with magnetic telescopic pick up

### Light Output

Focused light beam of 30 lumen helps reach out in dark areas


### Robust Construction

- Durable aluminium body
- Flexible telescopic design. Extend length from 7-1/2" (190 mm) to 23-1/4" (590 mm) to reach out into narrow holes & crevices
- Magnet at the front end to pick up small metallic parts conveniently
- Adjustable focus to direct light beam as per need
- Integrated pocket clip for convenient and safe carrying around

### Hands Free Use

Magnet at the rear end of light can be affixed onto any metallic surface leaving both hands free





### Power Source



4 × 1.5LR44 BATTERIES (included)



### FEATURES

LUMEN	RUN TIME
 30	 4 H
BEAM ANGLE	BEAM DISTANCE
 15°	 10 m
OPERATING TEMPERATURE	
-10°C TO 40°C (33.8°F TO 104°F)	

### ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
LED/131	55053	100



**7W LED handheld spotlight & worklight**  
7W CREE® LED, Xm-L2

**NEW!**

**Light Output**


High quality, super-bright, focussed, user controlled multiple mode output

CE RoHS CREE

**100% Waterproof Construction**


- a. IP67 Rated  
Protected against dust & effects of water immersion upto 1 metre
- b. Designed to float
- c. Shock proof & lightweight ABS body, rubber head & ergonomic TPR grip
- d. Shock-proof polycarbonate lens
- e. Waterproof trigger to control light modes
- f. Integrated fold out stand converts hand-held spot light into a worklight
- g. Lanyard with SOS whistle

**Power Source**




**RECHARGEABLE BATTERY**  
3.7V 2200 mAh

**Charging of Battery**




**AC CHARGER (100-240V)**  
**CHARGE TIME**  
4-5 HOURS



**DC CAR CHARGER (12-24V)**  
**CHARGE TIME**  
3-4 HOURS



**Multiple Mode Output**

	1ST PRESS	2ND PRESS	3RD PRESS	4TH PRESS & HOLD
TYPE	HIGH INTENSITY	LOW INTENSITY	SOS FLASHING	RED FLASHING
LUMEN	700	350		
RUN TIME	2 hrs	4.5 hrs		



Front Light



Red flashing backlight



Floats in water



Integrated fold out stand converts hand held spotlight into a worklight

**ORDERING INFORMATION**

CAT NR.	ORD NR.	BOX QTY.
LED/402	55083	100

**FEATURES**

MAX. LUMEN	WATER & DUST PROOF RATING	BEAM DISTANCE
 700	 IP67	 400 M



[www.groz-tools.com](http://www.groz-tools.com)



**HEAD LAMPS**



**High quality aluminium alloy head lamp with excellent water resistance**

**Innovative Design**

Light can be separated from head band & used as a flashlight

**Light Output**

Powerful multiple output with bright and balanced illumination

**Robust Construction**


- a. **IP 65 Rated**  
Protected against dust and effects of low pressure water jet from any direction
- b. Black woven high quality, anti-skid head band with soft built-in protection to avoid imprint on forehead
- c. Flashlight: robust aluminium alloy body with military grade anodised coating for enhanced durability
- d. Flashlight has an integrated pocket clip for convenient & safe portability

**Hands Free Operation**


Super strong Magnet at the rear end of the light latches onto any metallic surface, leaving both hands free

**Dual Power Source**

Dual power smart cell design enables the light to be used with:



**RECHARGEABLE BATTERY**  
3.7V 750 mAh (included)



**1 AA BATTERY**  
(not included)

**Charge Time**

4 hours

**FEATURES**

<b>MAX. LUMEN</b> 130	<b>BEAM ANGLE</b> 12°	<b>BEAM DISTANCE</b> 75 M
<b>WATER &amp; DUST PROOF RATING</b> IP65		<b>OPERATING TEMPERATURE</b> -20°C TO 45°C (-4°F TO 113°F)

**NEW!**

CE RoHS CREE



**DETACHABLE DESIGN**  
Simply pull out the light from the head band frame, to use as mini flashlight



Complete with a unique Li-ion Battery with in-built micro USB port



Rotate light to focus at required angle

**Multiple Mode Output**

	1ST PRESS	2ND PRESS	3RD PRESS & HOLD	4TH PRESS
	FULL INTENSITY	LOW INTENSITY	QUICK FLASHING	SOS FLASHING
LUMEN	130	30		
RUN TIME	3 hours	13 hours		

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/240	55072	5 × 1 × 1-3/16	126 × 26 × 30	36



**39**

# 3W COB Rechargeable Head Lamp with Sensor

LED-220

**Powerful 3W COB head lamp for superior hands free illumination. A must - have for every professional user**

**NEW!**  
**RoHs**

**Innovative & Unique Design**

- a. Detachable Design: Light can be separated from head band and used as a worklight
- b. In-built sensor function with hands free ON/OFF. Wave to activate/deactivate light

**Light Output**

Powered by COB LED technology, the GROZ LED/220 provides extremely powerful multiple output with bright and even illumination

**Ergonomic Construction**


- a. Impact proof ABS light
- b. Black woven head band with soft built-in protection pad to avoid imprint on forehead
- c. Light attached to head band with a strong & powerful magnet
- d. Light can be easily rotated to focus at required angle



**Hands Free Sensor:**  
 Wave to activate/  
 deactivate light



**Power Source**



**RECHARGEABLE BATTERY**  
 3.7V 2200 mAh

**Charging of Battery**

Battery can be recharged using a standard 1m long USB cable, provided with the light

**Charge Time**

4 hours



**Detachable Design**

The light is attached to the head band with the help of a magnet

**FEATURES**

<b>MAX. LUMEN</b>	
<b>BEAM ANGLE</b>	<b>BEAM DISTANCE</b>
<b>OPERATING TEMPERATURE</b>	
-20°C TO 40°C (-4°F TO 104°F)	



Rotate light to focus at required angle

**Multiple Mode Output**

	NORMAL MODE			SENSOR MODE
	1ST PRESS	2ND PRESS	3RD PRESS	PRESS & HOLD
	High Intensity	Low Intensity	Quick Flashing	High Intensity
<b>LUMEN</b>	150	35		150
<b>RUN TIME</b>	4 hours	12 hours		4 hours

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/220	55052	1-57/64 × 1-1/2 × 3-5/32	48 × 38 × 80	24

40

## 3W LED Headlamp With Sensor

LED-206

**Superior 3W LED headlamp for use in automotive, plant maintenance & construction applications**

**Superior Design**

- a. In-built sensor function with hands free ON/OFF. Wave to activate/deactivate light
- b. In-built zoom feature

**Light Output**


Super bright LED light with extra power CREE XPE light output in multiple modes

**Ergonomic Construction**

- a. Impact Resistant ABS light with 90° swivel
- b. Black woven head band with soft built-in protection pad to avoid imprint on forehead

Built-in Zoom feature

**Power Source**



3 × AAA ALKALINE BATTERY (Included)

**NEW!**



CE RoHS CREE



**Hands Free Sensor: Wave to activate/deactivate light**



**FEATURES**

LUMEN	BEAM DISTANCE
 <p>120</p>	 <p>100 M</p>
OPERATING TEMPERATURE	
<p>-20°C TO 45°C (-4°F TO 140°F)</p>	

**Multiple Mode Output**

	ORANGE BUTTON			WHITE BUTTON
	1ST PRESS	2ND PRESS	3RD PRESS	PRESS ONCE TO ACTIVATE HAND SENSOR
	Red Light	Hazard Flasher	Main Light	Main Light
LUMEN	-	-	120	120
RUN TIME	-	-	6 hours	6 hours

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/206	55082	2 × 2-15/32 × 1-21/32	50 × 62.5 × 42	25

41

# 3W COB Head Lamp

LED-230

**NEW!**  
CE

Versatile headlamp with dual output; spot light & floodlight in one

Provides light near & far making it ideal for professional use

**Unique Combination Design**

Packs a focus light & floodlight in one with 1W centre light for focussed beam & 3W COB circumference flooding light


**Light Output**

Outstandingly bright COB light for highly bright & uniform output

**Sturdy Construction**

- a. Adjustable head band with built-in protection pad to avoid imprint of forehead
- b. Impact proof ABS light
- c. Light adjustable up to 45° to direct light beam as per need

**Power Source**



3 × AAA ALKALINE BATTERY (Included)




1W LED light

3W COB light



**FEATURES**

MAX. LUMEN		OPERATING TEMPERATURE			
		-20°C TO 45°C (-4°F TO 140°F)			
BEAM ANGLE		LED LIGHT		COB LIGHT	
		90°			
		80 M			
		50 M			

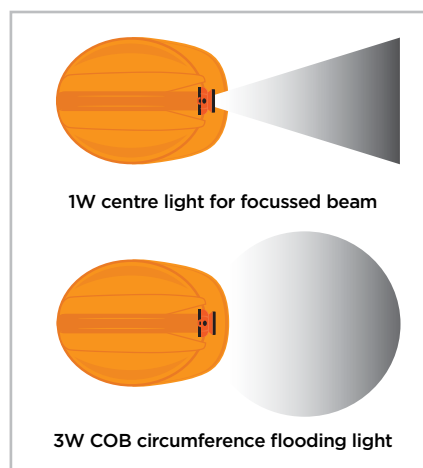

**ORDERING INFORMATION**

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/230	55055	2-1/16 × 2-9/16 × 2-3/16	52 × 65 × 55	40

**Multiple Mode Output**

	1ST PRESS	2ND PRESS	3RD PRESS
	LED Light	COB Light	Quick Flashing
LUMEN	70	160	
RUN TIME	9 hrs	3 hours	

# WHY US?



GROZ presents the industry's premium line of high performance LED lights. All lights have been carefully designed and manufactured with improved light output, battery capacity, ergonomics, durability, user-friendliness and functionality. Incorporating the latest technology, these are ideal for the professional users in industry, automotive, construction, agricultural, mining, adventure and several other outdoor applications.

LED technology is amongst the fastest evolving technologies. Due to our distinctive strength in product design, manufacturing and in-house know-how we have the capability to constantly upgrade our product line and pursue new opportunities. We strive to be an active partner for our customers and users and constantly work on providing, technical know-how, marketing and service support to help sell the product.





**Groz Engineering Tools (P) Ltd.  
Groz Net Industries**

Village Kherki Daula, National Highway-8  
Gurugram -122001, Haryana, INDIA  
TEL +91.124.282.7700  
FAX +91.124.282.7986  
FAX USA +1.509.271.7848  
FAX UK +44.870.121.1854  
E-MAIL [info@groz-tools.com](mailto:info@groz-tools.com)  
URL [www.groz-tools.com](http://www.groz-tools.com)

**CONNECT WITH US!**

