

Ideal for most application in HVAC/R, plumbing & heating, electrical, automotive & other industrial jobs

Rugged & ergonomic design for general purposes

Ultra low power consumption in shut-down mode

Extended long time measuring reliability

Backlit LCD display

Switchable On/Off Laser sighting

Choice between Fahrenheit & Celsius scales

Auto off

INCLUDES

1 'CR2032' battery

SPECIFICATION

Distance To Spot (Ds) Ratio	8:1
Range	-20°C to 317°C
Emissivity	Fixed at 0.95
Resolution	0.5°C
Accuracy	± 2%
Operating Temperature	0°C to 50°C, 10 to 90% RH




RoHS

WEEE



Optical resolution (field-of -view) 8:1

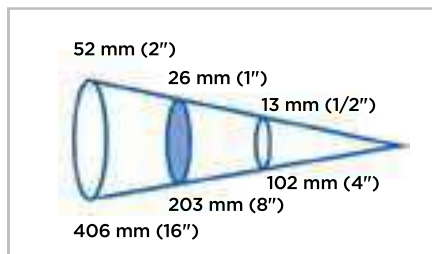

ORDERING INFORMATION

CAT NR.	BOX QTY.
IRT207	1